

To convert this ladder to a Deck ladder

Purchase our #CK100 Conversion Kit and cut the handrails under the deck platform as indicated in the photo below. *Be sure to cut the legs on the "swing up" side of the ladder.* Follow the instructions provided with the conversion kit to fasten the ladder to the deck.



OPTIONAL ACCESSORY SKIM-IT SKIMS OFF DEBRIS

Cut cleaning time 75% with skimmer extension that guides debris directly into your skimmer. Fits most in-ground and above-ground pool skimmers. Corrosion-resistant plastic Skim-It installs in seconds without tools.




To order call 1-800-635-3213

Swing up instructions

When not in use always secure ladder by swinging up outer treads and locking with cable lock provided.

To swing up the outer treads stand on the bottom tread, grasp the underside of the second lowest tread and swing it out toward you. Swing them up until the tread connectors drop into the preformed locks on each leg and stay in the upright position. To lower the treads lift them straight up to clear the locks and carefully swing them down toward you.

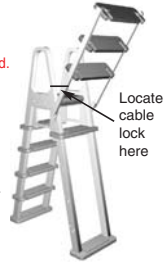

SAFETY RULES

- Locate ladder on a solid base
- One person on the ladder at a time
- Ladder **MUST** be installed per manufacturer's instructions
- **DANGER:** No Jumping or Diving from ladder
- Face ladder when entering and leaving pool
- To prevent entrapment or drowning - Do not swim through, behind or around ladder
- Ladder to be used as a swimming pool ladder only
- Ladder must be fastened to top seat
- Maximum weight on steps not to exceed 300 lbs.
- When ladder is not in use lock up outer treads with cable lock provided

WARNING: Exceeding the recommended weight requirement may cause the ladder to fail.


***DANGER: Never use an electric drill in or around the pool**

SAVE THESE INSTRUCTIONS
DEALER/INSTALLER: GIVE TO HOMEOWNER

MODEL #7000

"ELIMINATOR" A-FRAME LADDER

Assembly Instructions

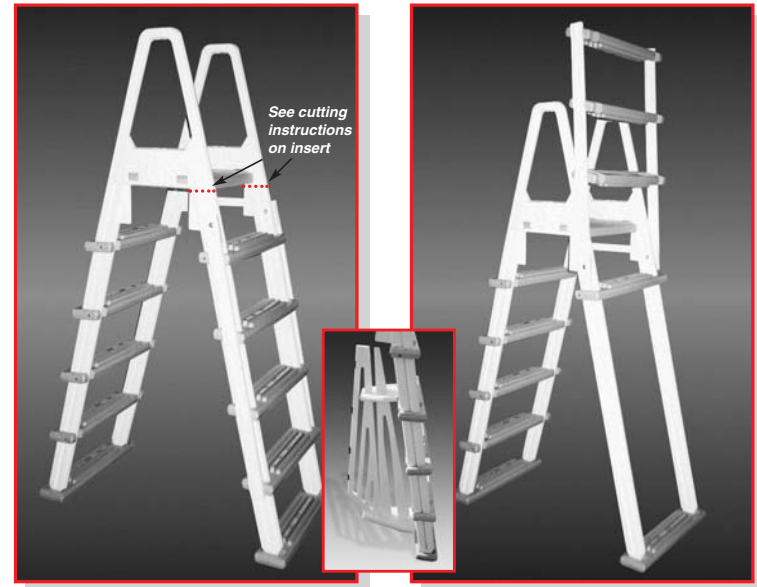

As required by ANSI/NSPI - This ladder is equipped with an anti-entrapment barrier to prevent children from swimming behind or through the rungs of the ladder. It is NOT intended as a substitute for proper adult supervision.



LIMITED, PRO-RATED WARRANTY

Confer Plastics, Inc. warrants their swimming pool ladders to be free from defects in workmanship for one year from date of purchase. After the first year the cost to replace a part is as follows:

MODELS #626B
2nd Year - 40%
3rd Year - 80%

ALL OTHER MODELS:
2nd Year - 20%
3rd Year - 40%
4th Year - 60%
5th Year - 80%

Plus shipping/handling charges

DO NOT RETURN DEFECTIVE PART TO DEALER

The defective part should be returned, postpaid, to: Confer Plastics, Inc.
97 Witmer Road
North Tonawanda
N.Y. 14120-2421

Enclose proof-of-purchase (receipts, etc.) showing date purchased, your name, address, and daytime phone number. You will be notified of cost to replace part.

This warranty gives you specific legal rights, and you may also have other rights which may vary from state to state.

MADE IN THE U.S.A. by:



Printed in U.S.A.

97 Witmer Road
North Tonawanda, New York 14120-2421
Toll Free U.S. 800-635-3213
716-694-3100 / FAX 716-694-3102
www.conferladders.com




Made in U.S.A. by

MODEL # 7000 "ELIMINATOR" A-FRAME LADDER

ADJUSTABLE to fit 48" TO 54" ABOVE GROUND POOLS

PARTS LIST	HARDWARE PACK
4 - Handrail / Leg	26 - #10 x 1-1/4" Screw
1 - Deck Platform	2 - 1/4-20 x 3-1/4" Bolt
2 - Bottom Tread	6 - 1/4" Washer
8 - Upper Tread (Slip-on Style)	2 - 1/4" Nylon Nut
2 - Adjustable Brace	2 - 1/4-20 x 2-1/4" Bolt
1 - Tread Connector (Left Hand)	2 - 1/4" Hex Nut
1 - Tread Connector (Right Hand)	4 - Push in Plug
	1 - Cable Lock Set




Tools required for assembly:

Hammer or mallet, Cordless drill motor, 1/8" & 9/32" drill bits, Phillips screwdriver bit. Pliers, 7/16" wrench or adjustable wrench.

Step 1.

IMPORTANT: Remove the wedges from the deck platform protrusions and SAVE for step 5.

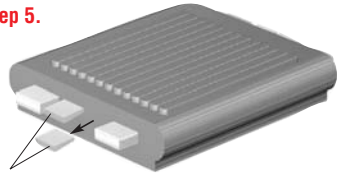

Twist and save. Pliers may be useful to aid in removal.


Step 2.

Slide the handrail/ legs together as shown. Apply liquid soap or spray lubricant to aid assembly.



Step 3.


Push down firmly.

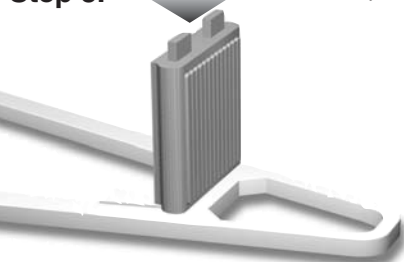

Place one handrail/leg assembly on a clean flat surface and push the deck platform protrusions in the openings.


Step 4.

Push down firmly.

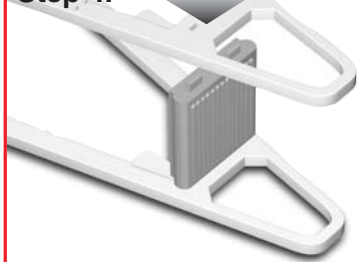


Repeat the process with the second handrail/leg assembly, pushing firmly down onto the deck protrusions to ensure a secure fit.

Step 5.

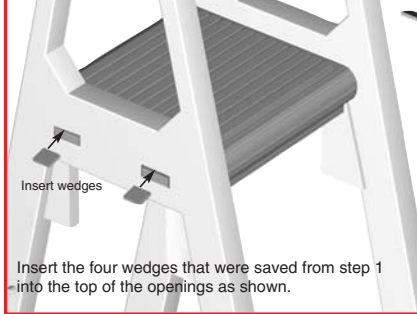


Insert the four wedges that were saved from step 1 into the top of the openings as shown.


Step 6.

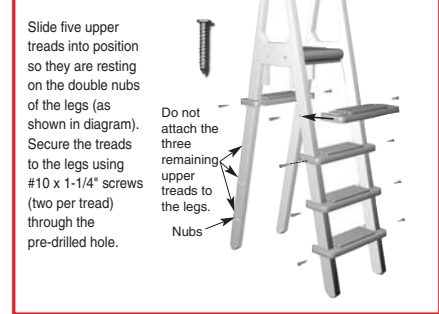

Step 7.

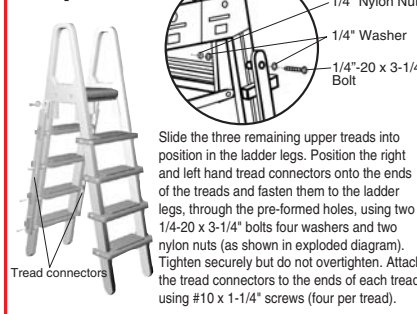


Step 8.

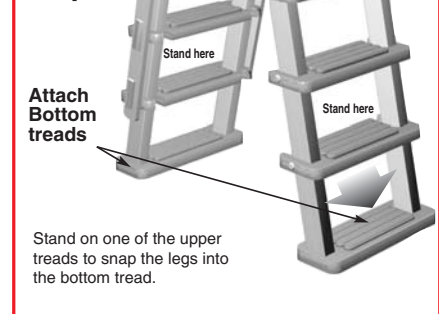

Step 8a.

Please refer to the separate instruction sheet for anti-entrapment barrier installation.

Step 9.

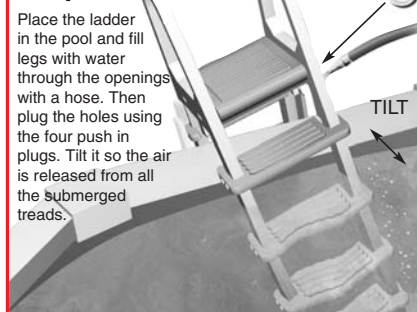

Step 10.

